




## 2/2-Way Solenoid Control Valve

- Made for custom engineered applications
- Orifice sizes DN 2 ... 8 mm
- Port connection 3/8", 1/2" or customer specific

Type 2865 is an extremely compact solenoid control valve and is available with an orifice up to 8mm. It is based on the standard version of Type 2875 (see datasheet). It is used as an actuator in closed control loops (pressure, flow, temperature, etc.). Compared with the standard version, the valve is essentially of simpler construction and assembly and testing procedures are optimized, easing high volume series production with shorter delivery times. Please follow the instructions for a customised design on page 4 of this datasheet.

### Circuit function A



direct acting 2-way  
solenoid control valve,  
normally closed

Valve control takes place through a PWM signal<sup>1)</sup>. The duty cycle of the PWM signal determines the coil current and hence the position of the plunger.

The Bürkert control electronics Type 8605 (see relevant datasheet) converts an analog signal to a reference value corresponding to the valve type PWM signal and provides additional functions such as temperature compensation (coil heating), ramp function and the adjustment of min. and max. duty cycle/coil current for the control range.

Please note the sizing comments for such a control valve on page 2.


Technical Data - Valve	
<b>Body material</b>	Brass, stainless steel
<b>Seal material</b>	FKM, EPDM on request
<b>Medium</b>	Neutral gases, liquids on request
<b>Pressure range</b>	• 0 ... -25 bar <sup>2)</sup>
<b>Medium temperature</b>	-10 ... +90 °C
<b>Ambient temperature</b>	max. +55 °C
<b>Power supply</b>	24 V DC
<b>Max. current</b>	750mA (at 24V-hold)
<b>Power consumption</b>	16 W
<b>Duty cycle</b>	100% continuously rated
<b>PWM control frequency</b>	280 Hz
<b>Port connection</b>	3/8", 1/2" others on request
<b>Electrical connection</b>	Cable plug Type 2508, Form A industrial standard Item no. 008 376
<b>Installation</b>	As required, preferably with actuator in upright position
<b>Typical control data<sup>3)</sup></b>	
Hysteresis	< 5%
Repeatability	< 1.0 % of F.S.
Sensitivity	< 1.0 % of F.S.
Span	1:25
<b>Protection class - valve</b>	IP65

<sup>1)</sup> PWM pulse width modulation

<sup>2)</sup> Pressure data [bar]: Measured as overpressure to the atmospheric pressure, orifice further depends on nominal pressure

<sup>3)</sup> Characteristic data of control behaviour depends on process conditions

Characteristics of a proportional valve

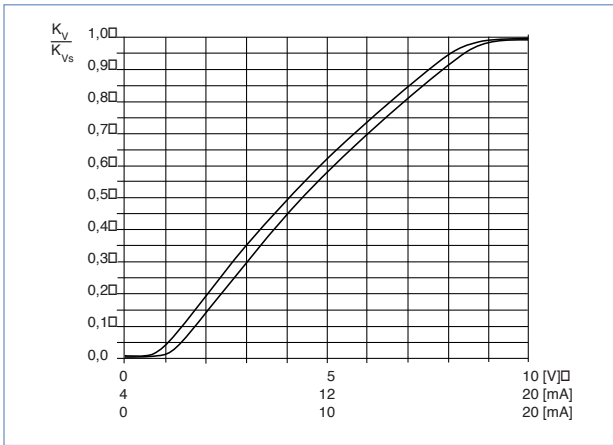

Advice for valve sizing

In continuous flow applications, the choice of appropriate valve size is much more important than with on/off valves. The optimum size should be selected such that the resulting flow in the system is not unnecessarily reduced by the valve. However, a sufficient part of the pressure drop should be taken across the valve even when it is fully opened.

**Recommended value:  $\Delta p_{\text{valve}} > 25\%$  of total pressure drop within the system**

Otherwise, the Ideal, linear valve curve characteristic is changed.

For that reason take advantage of Bürkert competent engineering services during the planning phase!

Determination of the  $k_v$  value

Pressure drop	$k_v$ value for liquids [m <sup>3</sup> /h]	$k_v$ value for gases [m <sup>3</sup> /h]
Subcritical $p_2 > \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{514} \sqrt{\frac{T_1 \rho_N}{p_2 \square p}}$
Supercritical $p_2 < \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{257 p_1} \sqrt{T_1 \rho_N}$


- $k_v$  Flow coefficient [m<sup>3</sup>/h]<sup>4)</sup>
- $Q_N$  Standard flow rate [m<sup>3</sup>/h]<sup>5)</sup>
- $p_1$  Inlet pressure [bar]<sup>6)</sup>
- $p_2$  Outlet pressure [bar]<sup>6)</sup>
- $\Delta p$  Differential pressure  $p_1 - p_2$  [bar]
- $\rho$  Density [kg/m<sup>3</sup>]
- $\rho_N$  Standard density [kg/m<sup>3</sup>]
- $T_1$  Medium temperature [(273+t)K]

<sup>4)</sup> measured for water,  $\Delta p = 1$  bar, via the device


<sup>5)</sup> Standard conditions at 1.013 bar<sup>6)</sup> and 0 °C (273K)

<sup>6)</sup> Absolute pressure

Dimensions [mm]

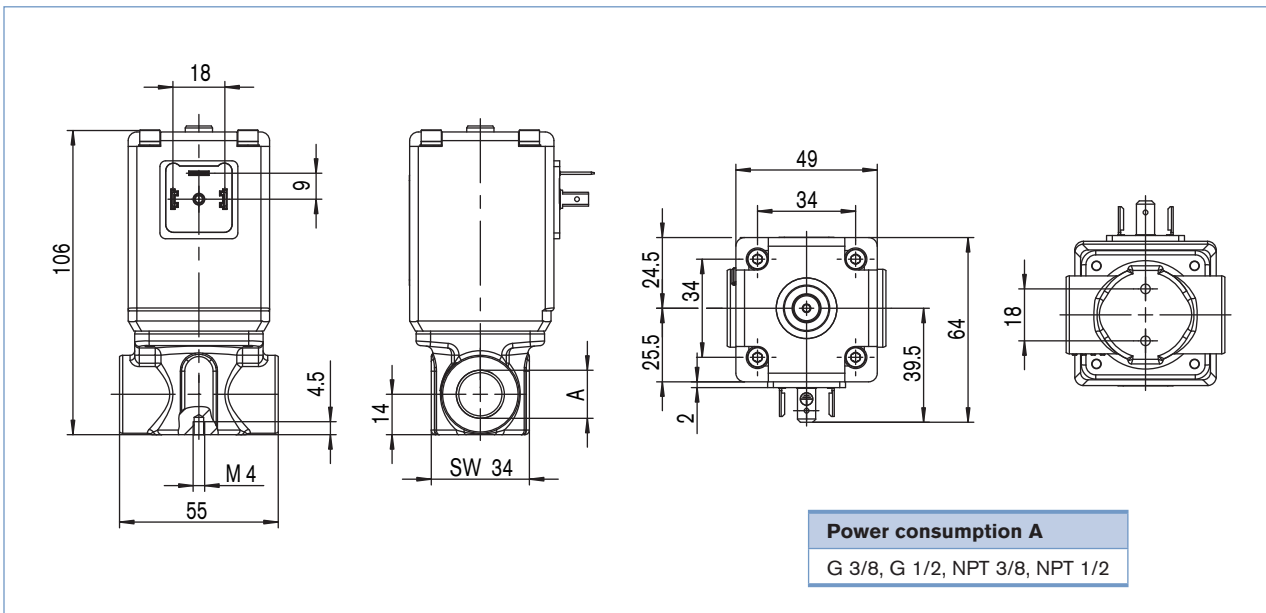


Ordering chart

Circuit function	Orifice [mm]	Port connection <sup>7)</sup>	k <sub>vs</sub> value water [m <sup>3</sup> /h] <sup>8)</sup>	Q <sub>Nn</sub> value [l/min] <sup>9)</sup>	Nominal pressure <sup>10)</sup> [bar]	Item no. brass	Item no. stainless steel
A 2/2-way normally closed (NC) 	2	G 3/8	0.12	129	25	275 058	250 669
	3	G 3/8	0.25	270	10	256 811	249 133
	4	G 3/8	0.45	485	8	249 264	250 213
		G 1/2	0.45	485	8	242 298	247 295
	6	G 1/2	0.80	862	4	242 435	247 294
	8	G 1/2	1.10	1186	2	250 089	275 059

Ordering chart - variants with ATEX / IECEx

ATEX - II 2 G EEx m II T4 or T6  
IECEx - Ex e mb IIC T6 Gb

Circuit function	Orifice [mm]	Port connection <sup>7)</sup>	k <sub>vs</sub> value water [m <sup>3</sup> /h] <sup>8)</sup>	Q <sub>Nn</sub> value [l/min] <sup>9)</sup>	Nominal pressure <sup>10)</sup> [bar]	Item no. brass	Item no. stainless steel
A 2/2-way normally closed (NC) 	2	G 3/8	0.12	129	25	274 889	on request
	3	G 3/8	0.25	270	10	274 890	on request
	4	G 3/8	0.45	485	8	274 891	on request
		G 1/2	0.80	862	4	265 715	on request
	6	G 1/2	1.10	1186	2	274 892	on request

<sup>7)</sup> Port connection: NPT and flange on request.

<sup>8)</sup> k<sub>vs</sub> value: Flow rate value for water, measured at +20 °C and 1 bar pressure differential over a fully opened valve.

<sup>9)</sup> Q<sub>Nn</sub> value: Flow rate for air with inlet pressure of 6 bar, 1 bar pressure differential and +20 °C.

<sup>10)</sup> Pressure data [bar]: Overpressure with respect to atmospheric pressure.

Please use page 4 of this datasheet to inquire about your individual requirements

**i Further versions on request**

- Materials**
  - Other seal materials
  - Valve body with special armature

- Analytical**
  - Oxygen version
  - Parts oil-, fat- and silicon free

- Coil**
  - Other coil power
  - Specific, power settings for lower Pressure
  - Other operating voltages
  - Coil with flying leads

- Valve armature**
  - Special valve orifice

**Note**

You can fill out the fields directly in the PDF file before printing out the form.

**Design data for custom engineered solenoid control valves**

▶ Please fill out this form and send to your local Bürkert Sales Centre\* with your inquiry or order

Company	Contact person
Customer No	Department
Address	Tel./Fax
PLZ-Ort	E-mail

= Mandatory fields       Quantity       Requested delivery date

**Process data**

**Medium**

**State of medium**       liquid       gaseous

**Medium temperature**       °C

**Maximum flow rate**       $Q_{nom} =$        Unit:

**Minimum flow rate**       $Q_{min} =$        Unit:

**Inlet pressure at nominal operation**       $p_1 =$        barg

**Outlet pressure at nominal operation**       $p_2 =$        barg

**Max. inlet pressure (nominal pressure)**       $p_{1max} =$        barg

**Ambient temperature**       °C

**Additional specifications**

**Body material**       Brass       Stainless steel       other

**Seal material**       FKM       other

**Note** Please state all pressure values as **overpressures with respect to atmospheric pressure** [barg].

DTS 1000173852 EN Version: C Status: RL (released | freigegeben | valide) printed: 24.10.2016

To find your nearest Bürkert facility, click on the orange →

[www.burkert.com](http://www.burkert.com)

In case of special application conditions, please consult for advice.

Subject to alteration.  
© Christian Bürkert GmbH & Co. KG

1504/2\_EU-en\_00895219